



## ROOF ANCHORAGE CONNECTORS

When you're out on the wood or steel roof of a residential or commercial structure, whether flat or sloped, your fall protection system needs specialized components to keep you safe without causing damage to the structure. Our easy-to-use kits and anchorage devices provide the perfect solution and meet the latest OSHA and ANSI standards.

### 2104168

#### ROOFER'S FALL PROTECTION KIT

Complete fall protection system in a bag for convenient compliance and safety on the job.

Kit includes:

- Reusable Roof Anchor (2103673)
- Full Body Harness (1103513)
- Rope Adjuster with Shock Absorbing Lanyard (1224005)
- Lifeline x 50 ft. (1202794)
- Counterweight (5901583)
- Carrying Bag (9511597)



**2104169** Roofer's Fall Protection Kit with 2103676 Roof Anchor

### 7611907

#### TWO-PERSON ROOFER'S FALL PROTECTION KIT

Complete fall protection system in a bag for convenient compliance and safety on the job. Kit includes:

- Two Delta™ Full Body Harnesses (1103513)
- 50 ft. Sayflite™ HLL System with Two 2103673 Reusable Roof Anchors (7600511)
- Two Rope Adjusters with Shock Absorbing Lanyards (1224005)
- Two 50-ft. Lifelines (1202794)
- Two Counterweights (5901583)
- Two Carrying Bags (9511597 / 9506162)



**7611904** One-Person 50-ft. Sayflite™ HLL System, rope adjuster with shock absorbing lanyard, two reusable roof anchors and carrying bag.


**7600511** 50-ft. Sayflite™ HLL System with two reusable roof anchors and bag only—for two people.



### 2105683

#### REUSABLE SWIVELING ROOF ANCHOR

Provides 360 degrees of mobility and protection on sloped or flat wood and metal decking. For use with 30 ft. 3504430 or 50 ft. 3504450 Ultra-Lok™ SRL (order separately). May also be used as end-anchors for horizontal lifeline system.

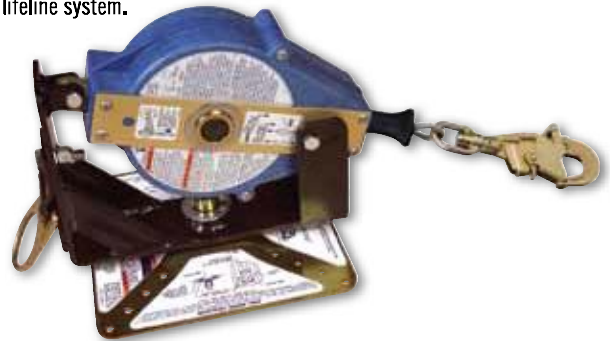

### 3505694

#### REUSABLE SWIVELING ROOF ANCHOR

Provides 360 degrees of mobility and protection on sloped wood roofs. Includes 30 ft. 3504430B Ultra-Lok™ SRL.

**3505695** Reusable swiveling roof anchor with 50 ft. 3504450B Ultra-Lok™ SRL



## 2103673

### PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with twelve 16D nails or six 1/4" x 2-1/2" bolts. Can be used with horizontal lifeline systems for added versatility.



## 2103676

### PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with 20 ea. 16D nails. Simple hinge style design is extremely easy to transport, install, dismantle and store.



## 2103677

### PORTABLE REUSABLE ROOF ANCHOR

For use on flat or sloped wood roofs. Installs with three grade 5, 5/16" x 3" min. lag screws. Compact design is extremely easy to transport, install, dismantle and store.



## 2104541

### DETACHABLE ROOF ANCHOR WITH FLASHING

Removable D-ring assembly allows you to leave behind the clamp assembly and then shingle over it, reusing the D-ring at another location. Fits 2x6 to 2x8 roof truss, joist or rafter.



**2104540** Detachable Roof Anchor, fits 2x4

**2104542** Detachable Roof Anchor, fits 2x10 to 2x12

## 2103670

### PERMANENT ROOF ANCHOR WITH FLASHING AND CAP

Clamps onto roof truss up to 2x8 size and comes complete with flashing to prevent leakage and D-ring cap for aesthetics. Provides fall protection during initial construction as well as for future homeowner.




**2103671** Permanent Roof Anchor with Flashing and Cap, fits 2x10 to 2x12

## 2103675

### PORTABLE/REUSABLE STANDING SEAM ROOF ANCHOR

Attaches to sloped or flat structural standing seam roofs. Telescoping adjustment fits 24", 30", 32" and 36" seam spacing. Swivels 360 degrees and designed for use with Ultra-Lok™ Leading Edge SRL (order SRL separately).

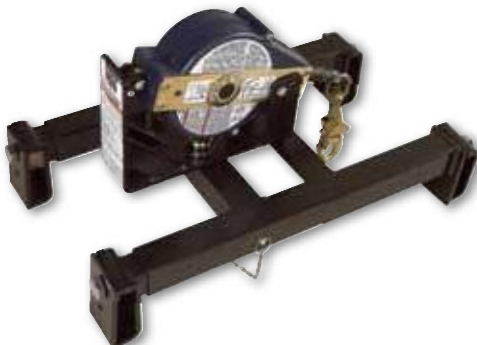

## 7255000

### FREESTANDING COUNTERWEIGHT ANCHOR

Freestanding system is easily placed on top of the roof surface to provide a tie-off point for one worker. Complete with 16 ea. 45 lb. (20 kg) counterweights and installs without penetrating the roof sheathing.



**7200439** 45 lb. (20 kg) Single Replacement Counterweight

## 2100139

### ROOF TOP ANCHOR FOR MEMBRANE TYPE ROOFS

All assembled kits include a baseplate and an integrated anchorage point for one user fall arrest. Permanent anchor assembly fastens through the membrane (up to 12", 300 mm), insulation and into the metal sheathing, wood sheathing or concrete.



**2100140** Anchor for PVC Roofs

**2100142** Anchor for Bitumin Roofs

## 2100133

### ROOF TOP ANCHOR WITH EXTRA LARGE BASEPLATE FOR METAL, CONCRETE AND WOOD

All assembled kits include an extra large baseplate and an integrated anchorage point for one user fall arrest. Permanent anchor assembly is designed for 26 gauge or thicker corrugated metal decking with ribs 10" (254 mm) to 20" (508 mm) apart, 5/8" (16 mm) CDX plywood or concrete.



## 2100138

### STANDING SEAM ROOF ANCHOR

Kit includes a baseplate and an integrated anchorage point for one user fall arrest. Permanent anchor assembly designed specifically for standing seam roofs.



**NOTE:** A supplement of fasteners, clamps and rivets are readily available for installation on a variety of roofing profiles.